

DIGITAL CALIPER (STANDARD MODEL)




1108-150



DATA OUTPUT

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Meet DIN862
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | L | a | b | c | d |
|-----------|---------------|----------|-----|----|------|----|----|
| 1108-150* | 0-150mm/0-6" | ±0.02mm | 236 | 21 | 16 | 16 | 40 |
| 1108-200* | 0-200mm/0-8" | ±0.03mm | 286 | 24 | 19 | 16 | 50 |
| 1108-300* | 0-300mm/0-12" | ±0.03mm | 400 | 25 | 20.5 | 17 | 60 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany

WATERPROOF DIGITAL CALIPER



ATTENTION: NO DATA OUTPUT


ATTENTION: IT IS NECESSARY TO SET ZERO AFTER POWER ON EACH TIME



1118-150B

IP67 WATERPROOF

- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Button function: zero, on/off, mm/inch, ABS/REL, hold
- Battery CR2032, meet DIN862
- Made of stainless steel



| Code | Range | Accuracy | L | a | b | c | d |
|------------|---------------|----------|-----|----|------|----|----|
| 1118-150B* | 0-150mm/0-6" | ±0.02mm | 236 | 21 | 16 | 16 | 40 |
| 1118-200B* | 0-200mm/0-8" | ±0.03mm | 286 | 24 | 19 | 16 | 50 |
| 1118-300B* | 0-300mm/0-12" | ±0.03mm | 400 | 25 | 20.5 | 17 | 60 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany

DIGITAL CALIPER (HIGH PRECISION)

ABSOLUTE SYSTEM




1103-150



HIGH PRECISION

DATA OUTPUT

- Absolute system
- Resolution: 0.01mm/0.0005"
- Buttons: mm/inch, ABS/REL, on/off, origin set
- Battery CR2032, automatic power off
- After automatic power off, move the digital unit to turn on power
- Data output
- Meet DIN862
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | L | a | b | c | d |
|-----------|---------------|----------|-----|----|------|----|----|
| 1103-150* | 0-150mm/0-6" | ±0.02mm | 234 | 20 | 15 | 16 | 40 |
| 1103-200* | 0-200mm/0-8" | ±0.02mm | 286 | 24 | 19 | 16 | 50 |
| 1103-300* | 0-300mm/0-12" | ±0.03mm | 390 | 26 | 21.5 | 16 | 60 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany

DIGITAL CALIPER




ATTENTION: NO DATA OUTPUT



1114-150A

- Zinc alloy house for digital unit
- Resolution: 0.01mm/0.0005"
- Buttons: zero, on/off, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Meet DIN862
- Made of stainless steel



| Code | Range | Accuracy | L | a | b | c | d |
|------------|---------------|----------|-----|----|------|----|----|
| 1114-150A* | 0-150mm/0-6" | ±0.02mm | 236 | 21 | 16 | 16 | 40 |
| 1114-200A* | 0-200mm/0-8" | ±0.03mm | 286 | 24 | 19 | 16 | 50 |
| 1114-300A* | 0-300mm/0-12" | ±0.03mm | 400 | 25 | 20.5 | 17 | 60 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany

DIGITAL CALIPER WITH ROUND DEPTH BAR




1119-150

DATA OUTPUT



- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Meet DIN862
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | L | a | b | c | d |
|-----------|--------------|----------|-----|----|----|----|----|
| 1119-150* | 0-150mm/0-6" | ±0.02mm | 236 | 21 | 16 | 16 | 40 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany

DIGITAL CALIPER WITH CARBIDE TIPPED JAWS




1110-150A



DATA OUTPUT

- Carbide tipped jaws for inside and outside measurements
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Meet DIN862
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | L | a | b | c | d |
|------------|--------------|----------|-----|----|----|----|----|
| 1110-150A* | 0-150mm/0-6" | ±0.02mm | 236 | 21 | 16 | 16 | 40 |

*Supplied with manufacturer inspection certificate traceable to DKD Germany
- Sizes available up to 300mm

DIGITAL CALIPER WITH CERAMIC TIPPED JAWS


DATA OUTPUT



1193-150



- Ceramic tipped jaws for outside measurement, extremely wear-resistant, non-magnetic, non-conductive
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Meet DIN862
- Made of stainless steel
- Optional accessory: data output cable



ceramic tipped jaws

(mm)

| Code | Range | Accuracy | L | a | b | c | d |
|-----------|--------------|----------|-----|----|------|----|----|
| 1193-150* | 0-150mm/0-6" | ±0.02mm | 235 | 21 | 16.5 | 16 | 40 |

- * Supplied with manufacturer inspection certificate traceable to DKD Germany
- Sizes available up to 300mm


MINI DIGITAL CALIPER

ATTENTION:
NO DATA OUTPUT



1111-100A

- Resolution: 0.01mm/0.0005"
- Buttons: zero, mm/inch, on/off
- Automatic power off, move the digital unit to turn on power
- Battery LR44
- Meet DIN862
- Made of stainless steel



Unit: mm

| Code | Range | Accuracy | L |
|-----------|--------------|----------|-------|
| 1111-100A | 0-100mm/0-4" | ±0.02mm | 170mm |


DIGITAL CALIPER

DATA OUTPUT



1170-300

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



(mm)

| Code | Range | Accuracy | a | c | d | e | L |
|----------|---------------|----------|----|----|----|----|-----|
| 1170-306 | 0-300mm/0-12" | ±0.04mm | 12 | 17 | 60 | 10 | 420 |
| 1170-300 | 0-300mm/0-12" | ±0.04mm | 12 | 17 | 90 | 10 | 420 |


PLASTIC DIGITAL CALIPER

ATTENTION:
NO DATA OUTPUT



1139-150

- Made of hard plastic, non-magnetic and non-conductive
- Prevent workpieces from scratching by calipers
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Battery CR2032, automatic power off



Unit: mm

| Code | Range | Accuracy |
|----------|--------------|----------|
| 1139-150 | 0-150mm/0-6" | ±0.1mm |


DIAL CALIPER

SHOCK PROOF



1312-150A

- Shockproof dial indicator
- Made of stainless steel



Dial indicator graduation 0.02mm (mm)

| Code | Range | Accuracy | L | a | b | c | d | D | t |
|------------|---------|----------|-----|----|------|----|----|-------|-----|
| 1312-150A* | 0-150mm | ±0.03mm | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1312-200A* | 0-200mm | ±0.03mm | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1312-300A* | 0-300mm | ±0.03mm | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |

Dial indicator graduation 0.01mm (mm)

| Code | Range | Accuracy | L | a | b | c | d | D | t |
|------------|---------|----------|-----|----|------|----|----|-------|-----|
| 1311-150A* | 0-150mm | ±0.03mm | 235 | 21 | 16.5 | 16 | 40 | Ø39 | 6.5 |
| 1311-200A* | 0-200mm | ±0.03mm | 288 | 24 | 19 | 16 | 48 | Ø39 | 6.5 |
| 1311-300A* | 0-300mm | ±0.03mm | 410 | 28 | 22 | 20 | 62 | Ø44.5 | 7.5 |


- * Supplied with manufacturer inspection certificate traceable to DKD Germany

VERNIER CALIPER



1205-150S

- Meet DIN862
- Made of stainless steel
- Satin chrome plated reading surface



Graduation 0.05mm/1/128" (mm)

| Code | Range | Accuracy | L | a | b | c | d |
|-----------|---------------|----------|-----|------|------|----|----|
| 1205-150S | 0-150mm/0-6" | ±0.05mm | 235 | 20.5 | 15.5 | 16 | 40 |
| 1205-200S | 0-200mm/0-8" | ±0.05mm | 290 | 23.5 | 19 | 17 | 50 |
| 1205-300S | 0-300mm/0-12" | ±0.05mm | 414 | 27.5 | 22 | 20 | 64 |


Graduation 0.02mm/0.001" (mm)

| Code | Range | Accuracy | L | a | b | c | d |
|------------|---------------|----------|-----|------|------|----|----|
| 1205-1502S | 0-150mm/0-6" | ±0.03mm | 235 | 20.5 | 15.5 | 16 | 40 |
| 1205-2002S | 0-200mm/0-8" | ±0.03mm | 290 | 23.5 | 19 | 17 | 50 |
| 1205-3002S | 0-300mm/0-12" | ±0.03mm | 414 | 27.5 | 22 | 20 | 64 |

DEPTH BASE ATTACHMENT



6140



- To increase the stability of depth measurement
- Suitable for digital calipers
- Made of stainless steel

| Code | a | b | c | Application |
|------|--------|-----|------|--------------------------------------------------------|
| 6140 | 16.5mm | 9mm | 75mm | Suitable for digital calipers with beam width (w) 16mm |


DIGITAL CALIPER



1136-501

DATA OUTPUT

- Resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | a | b | c | d | e | L |
|-----------|----------------|----------|----|----|----|-----|----|------|
| 1136-501 | 0-500mm/0-20" | ±0.05mm | 18 | 45 | 24 | 100 | 20 | 675 |
| 1136-601 | 0-600mm/0-24" | ±0.05mm | 18 | 45 | 24 | 100 | 20 | 770 |
| 1136-1002 | 0-1000mm/0-40" | ±0.08mm | 24 | 60 | 31 | 150 | 20 | 1220 |

Sizes available up to 2000mm


DIGITAL CALIPER



1106-501

DATA OUTPUT

- Resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable

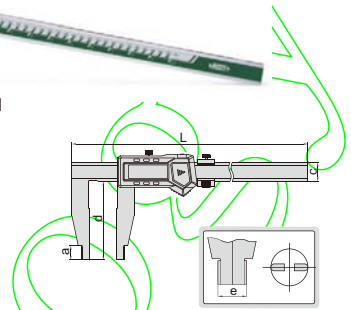

| Code | Range | Accuracy | a | c | d | e | L |
|-----------|----------------|----------|----|----|-----|----|------|
| 1106-501 | 0-500mm/0-20" | ±0.05mm | 18 | 24 | 100 | 20 | 675 |
| 1106-601 | 0-600mm/0-24" | ±0.05mm | 18 | 24 | 100 | 20 | 770 |
| 1106-1002 | 0-1000mm/0-40" | ±0.08mm | 24 | 31 | 150 | 20 | 1220 |

Sizes available up to 3000mm


DIGITAL CALIPER



1135-601

DATA OUTPUT

- Resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | a | c | d | L |
|----------|---------------|----------|----|----|-----|-----|
| 1135-601 | 0-600mm/0-24" | ±0.05mm | 45 | 24 | 100 | 770 |


Sizes available up to 1000mm

VERNIER CALIPER



1214-600

- Graduation: 0.02mm/0.001"
- With fine adjustment
- Made of stainless steel
- Satin chrome plated reading surface



| Code | Range | Accuracy | a | c | d | L |
|-----------|----------------|----------|----|----|-----|------|
| 1214-500 | 0-500mm/0-20" | ±0.05mm | 18 | 24 | 100 | 670 |
| 1214-600 | 0-600mm/0-24" | ±0.05mm | 18 | 24 | 100 | 770 |
| 1214-1000 | 0-1000mm/0-40" | ±0.08mm | 24 | 32 | 140 | 1216 |


Sizes available up to 2000mm

LONG JAW VERNIER CALIPER



1215-532

- Graduation: 0.02mm/0.001"
- With fine adjustment
- Made of stainless steel
- Satin chrome plated reading surface



| Code | Range | Accuracy | a | c | d | e | L |
|----------|---------------|----------|----|----|-----|----|-----|
| 1215-532 | 0-500mm/0-20" | ±0.06mm | 18 | 24 | 200 | 20 | 670 |
| 1215-622 | 0-600mm/0-24" | ±0.06mm | 18 | 24 | 150 | 20 | 770 |




Sizes available up to 3000mm

DIGITAL CALIPER WITH INTERCHANGEABLE POINTS CODE 1526-200

DATA OUTPUT



1526-200



depth stop 6143 (optional)



zero setting block for external measurement (included)



Point sleeve (optional)



Multifunctional points 7392 (optional)




Ball points 7391 (optional)




Screw thread points 7381, 7321 (optional)




Short spherical points (included)



Long spherical/flat points (included)



Spherical blade points (included)



- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143), data output cable




| Point | Range | Accuracy | Application |
|----------------------------|-------------------------------------------------------|----------|------------------------------------------------------------------------------|
| short spherical points | 12-212mm/0.5-8.5"(internal) | ±0.03mm | for grooves inside small hole |
| long spherical/flat points | 24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external) | ±0.03mm | spherical points for grooves inside hole flat points for external grooves |
| spherical blade points | 24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external) | ±0.03mm | for narrow grooves inside hole |

DIGITAL CALIPER WITH INTERCHANGEABLE POINTS CODE 1124-300A

DATA OUTPUT



1124-300A



depth stop 6143 (optional)



zero setting block for external measurement (included)



Multifunctional points 7392 (optional)




Ball points 7391 (optional)



Screw thread points 7381, 7321 (optional)




Short spherical/flat points (included)



Long spherical/flat points (included)



Short spherical blade points (included)



Long spherical blade points (included)



- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143), data output cable

| Point | Range | Accuracy | Application |
|------------------------------|-----------------------------------------------------------|----------|-------------------------------------------------------------------------------------------|
| short spherical/flat points | 24-324mm/1-12.7"(internal) 0-288mm/0-11.3"(external) | ±0.04mm | spherical points for grooves inside hole (small hole) flat points for external grooves |
| long spherical/flat points | 40-340mm/1.5-13.3"(internal) 0-272mm/0-10.7"(external) | ±0.04mm | spherical points for grooves inside hole (large hole) flat points for external grooves |
| short spherical blade points | 24-324mm/1-12.7"(internal) 0-288mm/0-11.3"(external) | ±0.04mm | for narrow grooves inside hole (small hole) |
| long spherical blade points | 40-340mm/1.5-13.3"(internal) 0-272mm/0-10.7"(external) | ±0.04mm | for narrow grooves inside hole (large hole) |

DIGITAL INSIDE GROOVE CALIPER


DATA OUTPUT



1120-150A



depth stop 6143 (optional)



- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable

| Code | Range | Accuracy | L | a | b | c | d | e |
|-----------|----------|----------|-----|---|------|----|----|---|
| 1120-150A | 22-150mm | ±0.04mm | 250 | 5 | 11 | 16 | 30 | 1 |
| 1120-200A | 25-200mm | ±0.04mm | 310 | 5 | 12.5 | 16 | 40 | 1 |

Sizes available up to 300mm

DIGITAL INSIDE POINT CALIPER




1121-150A

DATA OUTPUT



- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable



| Code | Range | Accuracy | L | a | b | c | d | D |
|-----------|----------|----------|-----|---|----|----|----|----|
| 1121-150A | 24-150mm | ±0.04mm | 250 | 5 | 12 | 16 | 30 | ∅2 |

Sizes available up to 300mm

DIGITAL INSIDE GROOVE CALIPER



1176-150

DATA OUTPUT



- Measure diameter of grooves inside bores
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable

| sizes to be measured (use upper jaws) | | sizes to be measured (use lower jaws) | | D1 | | L1 | | D2 | | L2 | |
|---------------------------------------|-----|---------------------------------------|-----|---------|-----|----|--|----|--|----|--|
| ∅9 | <8 | ∅15 | <10 | ∅19 | <42 | | | | | | |
| ∅10 | <15 | ∅16 | <16 | ∅20 | <50 | | | | | | |
| ∅11~150 | <30 | ∅17 | <28 | ∅21 | <58 | | | | | | |
| | | ∅18 | <34 | ∅22~150 | <70 | | | | | | |

| Code | Range of upper jaw | Range of lower jaw | Accuracy |
|----------|--------------------|--------------------|----------|
| 1176-150 | 9-150mm/0.35-6" | 15-150mm/0.59-6" | ±0.04mm |

DIGITAL INSIDE GROOVE CALIPER



1520-150

DATA OUTPUT



- Measure diameter of grooves inside small bores
- Resolution 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable



| Code | Range | Accuracy |
|----------|------------------|----------|
| 1520-150 | 11-150mm/0.43-6" | ±0.04mm |

DIGITAL OUTSIDE POINT CALIPER



1185-150A

DATA OUTPUT



- Measure wall thickness inside bores and recesses
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable


| Code | Range | Accuracy |
|-----------|--------------|----------|
| 1185-150A | 0-150mm/0-6" | ±0.04mm |

DIGITAL BLADE CALIPER




1188-150A

DATA OUTPUT



- The blade jaws fit into small grooves
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



| Code | Range | Accuracy | L | a | b | c | d | e |
|-----------|--------------|----------|-----|----|------|----|----|------|
| 1188-150A | 0-150mm/0-6" | ±0.03mm | 235 | 21 | 16.5 | 16 | 40 | 0.75 |


Sizes available up to 300mm

DIGITAL GEAR TOOTH CALIPER



1181-M25A

DATA OUTPUT



- Resolution: 0.01mm/0.0005"
- Carbide tips
- Buttons: zero, on/off, mm/inch
- Battery LR44
- Data output
- Made of stainless steel
- Optional accessory: data output cable

| Code | Range | Accuracy | L1 | L2 | a | b1 | b2 | d |
|-----------|---------|----------|-----|-------|----|----|----|------|
| 1181-M25A | M1-25mm | ±0.04mm | 170 | 165.5 | 21 | 16 | 16 | 30.5 |