


DIGITAL DEPTH GAGE (STANDARD MODEL)

DATA OUTPUT



1141-150A

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



Code	Range	Accuracy	L	a	b	d
1141-150A	0-150mm/0-6"	±0.03mm	230	6	14.5	100
1141-200A	0-200mm/0-8"	±0.03mm	280	6	14.5	100
1141-300A	0-300mm/0-12"	±0.03mm	380	6	14.5	150

Sizes available up to 500mm


DIGITAL DEPTH GAGE WITH MOUNTING HOLES FOR EXTENSION BASE

DATA OUTPUT



1147-150

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable, extension base (code 6141)



extension base (optional)


6141 series

Code	Range	Accuracy	L
1147-150	0-150mm/0-6"	±0.03mm	237
1147-200	0-200mm/0-8"	±0.03mm	287

Sizes available up to 300mm


DIGITAL HOOK DEPTH GAGE

DATA OUTPUT

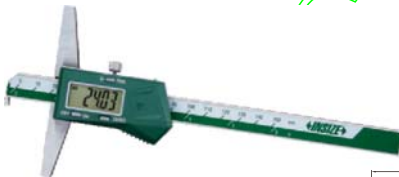

1142-150A

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



Code	Range	Accuracy	L	d
1142-150A	0-150mm/0-6"	±0.03mm	230	100

Sizes available up to 300mm


DIGITAL POINT DEPTH GAGE

DATA OUTPUT



1143-200A

- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable




Code	Range	Resolution	Accuracy
1143-200A	0-200mm/0-8"	0.01mm/0.0005"	±0.03mm

DIGITAL DEPTH GAGE WITH ROUND DEPTH BAR


DATA OUTPUT

MEASURE DEPTH OF SMALL HOLES (>Ø4mm)

MEASURE WIDTH AND DEPTH OF GROOVES INSIDE BORE

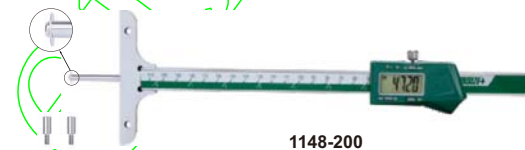


1148-200

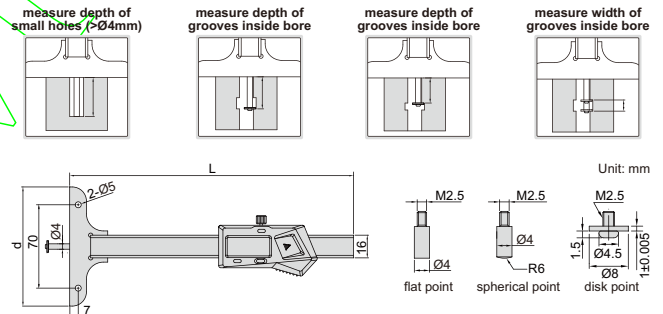

- Resolution: 0.01mm/0.0005"
- Supplied with three interchangeable points (flat, spherical, disk)
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable, disk points (see below table), extension base (code 6141, for 1148-200)



1148-P101 (optional), measure width of bottom grooves inside blind hole



Code	Range*	Accuracy	L	d	Remark
1148-200	0-200mm/0-8"	±0.03mm	300	101	with mounting holes for extension base

*When disk points are used, the range is reduced by 10mm

OPTIONAL DISK POINTS

Code	Description	H	Remark
1148-P101	0.5mm disk point	0.5±0.005mm	for narrow grooves
1148-P102	0.7mm disk point	0.7±0.005mm	for narrow grooves
1148-P103	1mm disk point	1±0.005mm	for grooves inside blind hole
1148-P104	0.5mm disk point	0.5±0.005mm	for grooves inside blind hole


DIGITAL DOUBLE HOOK DEPTH GAGE

DATA OUTPUT




1144-150A

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable



Code	Range	Accuracy	L	d
1144-150A	0-150mm/0-6"	±0.03mm	233	100
1144-200A	0-200mm/0-8"	±0.03mm	283	100
1144-300A	0-300mm/0-12"	±0.03mm	383	150



VERNIER DEPTH GAGE (STANDARD MODEL)



1240-200

Graduation 0.02mm (mm)


Code	Range	Accuracy	L
1240-1501	0-150mm	±0.03mm	245
1240-2001	0-200mm	±0.03mm	282
1240-3001	0-300mm	±0.04mm	382

Graduation 0.05mm (mm)

Code	Range	Accuracy	L
1240-150	0-150mm	±0.05mm	245
1240-200	0-200mm	±0.05mm	282
1240-300	0-300mm	±0.08mm	382

Sizes available up to 500mm



- Made of stainless steel
- Satin chrome plated reading surface



EXTENSION BASE



6141-320



- Supplied with two screws
- Made of stainless steel
- Suitable for depth gages series 1147, 1148, 1247, 1248 and 1249


Code	Length
6141-320	320mm

DIGITAL DEPTH GAGE

DATA OUTPUT



1145-25A



- Measure depth of small groove and hole, also measure depth of tire tread
- Buttons: on/off, zero, mm/inch
- Supplied with zero set surface
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable

Code	Range	Accuracy	Resolution
1145-25A	0-25mm/0-1"	±0.03mm	0.01mm/0.0005"






DIAL DEPTH GAGE




2342-202

- Accuracy: ±0.03mm
- Dial indicator stroke: 30mm
- Dial indicator graduation: 0.01mm
- Stainless steel base
- Extension rods: 25mm (1pc), 50mm (1pc), 75mm (1pc), 100mm (2pcs)
- Supplied with pointed tip and ball tip



Code	Range	Base
2342-202	0-300mm	101.5x17mm

DIAL DEPTH GAGE



2341-101A

- Dial indicator graduation: 0.01mm
- Stainless steel base
- Supplied with pointed tip and ball tip

Code	Range	Dial indicator stroke	Accuracy
2341-101A	0-10mm	10mm	±0.017mm


DIGITAL DEPTH GAGE

- Digital indicator stroke: 12.7mm/0.5"
- Digital indicator resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset, change measuring direction
- CR2032 battery, automatic power off
- Data output, stainless steel base
- Extension rods: 12.5mm (1pc), 25mm (1pc), 50mm (1pc), 75mm (1pc), 100mm (2pcs)
- Supplied with pointed tip and ball tip
- Optional accessory: data output cable




DATA OUTPUT

2141-202A

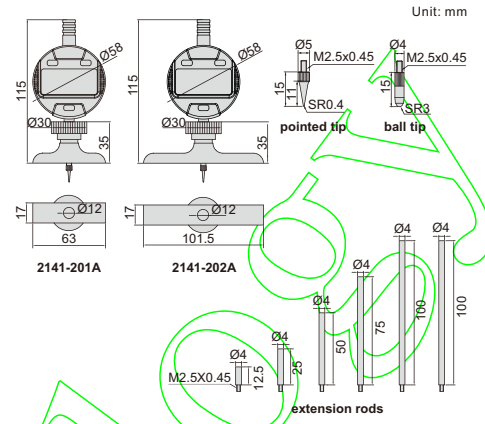

Code	Range	Accuracy	Base
2141-201A	0-300mm/0-12"	±0.02mm	63x17mm
2141-202A	0-300mm/0-12"	±0.02mm	101.5x17mm

DIGITAL DEPTH MICROMETER



IP54 WATERPROOF


DATA OUTPUT

3540-150

- Resolution: 0.001mm/0.00005"
- Micrometer head accuracy: $\pm 3\mu\text{m}$
- Rod accuracy: $\pm(2+L/75)\mu\text{m}$, L is the measuring range in mm
- Button function: on/off, set, mm/inch, ABS/INC, data output
- IP54 dust/waterproof
- Data output
- LR44 battery, automatic power off
- Rods with flat end
- Ratchet stop
- Optional accessory: data output cable

Code	Range	Rods
3540-150	0-150mm/0-6"	6pcs



Sizes available up to 300mm



DEPTH MICROMETER



3241-100



- Graduation: 0.01mm
- Micrometer head accuracy: $\pm 3\mu\text{m}$
- Rod accuracy: $\pm(2+L/75)\mu\text{m}$, L is the measuring range in mm
- Rods with flat end
- Ratchet stop


Code	Range	Rods
3241-25	0-25mm	1pc
3241-100	0-100mm	4pcs
3241-150	0-150mm	6pcs
3241-300	0-300mm	12pcs

LIGHT DUTY DIGITAL HEIGHT GAGE




1150-500

1150-1000

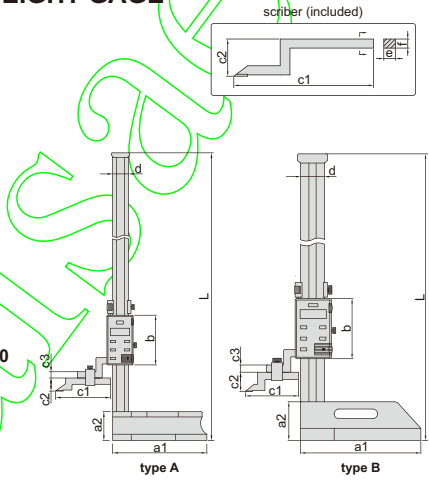

ATTENTION: BASIC MODEL

DATA OUTPUT

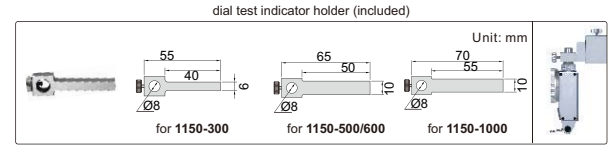

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, ABS/INC, data hold, TOL, set
- ABS/INC is for absolute and incremental measurement
- TOL is for tolerance measurement
- Carbide tipped scriber
- Made of stainless steel (except the base)
- LR44 battery
- Data output
- Supplied with dial test indicator holder
- Supplied with dust cover (except 1150-1500/2000)
- Optional accessory: data output cable (code 7301-SPC5)



supplied with dust cover (included)



Code	Range	Type	Accuracy	L	a1	a2	b	c1	c2	c3	d	e	f
1150-300	0-300mm/0-12"	A	±0.04mm	470	135	45	80	76	25	10	23	6	8
1150-500	0-500mm/0-20"	A	±0.05mm	720	180	55	95	103	25	12	30	10	12
1150-600	0-600mm/0-24"	A	±0.05mm	820	180	55	95	103	25	12	30	10	12
1150-1000	0-1000mm/0-40"	B	±0.07mm	1275	250	80	125	110	39	15	50	10	15

Sizes available up to 2000mm