


## DIGITAL DEPTH GAGE

- Digital indicator stroke: 12.7mm/0.5"
- Digital indicator resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset, change measuring direction
- CR2032 battery, automatic power off
- Data output, stainless steel base
- Extension rods: 12.5mm (1pc), 25mm (1pc), 50mm (1pc), 75mm (1pc), 100mm (2pcs)
- Supplied with pointed tip and ball tip
- Optional accessory: data output cable




DATA OUTPUT

2141-202A

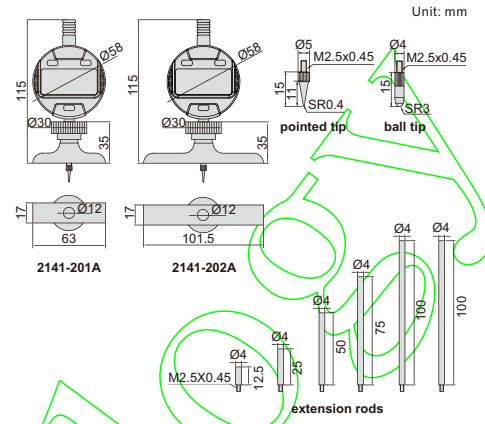

Code	Range	Accuracy	Base
2141-201A	0-300mm/0-12"	±0.02mm	63x17mm
2141-202A	0-300mm/0-12"	±0.02mm	101.5x17mm


## DIGITAL DEPTH MICROMETER



IP54 WATERPROOF

DATA OUTPUT

- Resolution: 0.001mm/0.00005"
- Micrometer head accuracy:  $\pm 3\mu\text{m}$
- Rod accuracy:  $\pm(2+L/75)\mu\text{m}$ , L is the measuring range in mm
- Button function: on/off, set, mm/inch, ABS/INC, data output
- IP54 dust/waterproof
- Data output
- LR44 battery, automatic power off
- Rods with flat end
- Ratchet stop
- Optional accessory: data output cable





3540-150

Code	Range	Rods
3540-150	0-150mm/0-6"	6pcs

Sizes available up to 300mm

## DEPTH MICROMETER



3241-100

- Graduation: 0.01mm
- Micrometer head accuracy:  $\pm 3\mu\text{m}$
- Rod accuracy:  $\pm(2+L/75)\mu\text{m}$ , L is the measuring range in mm
- Rods with flat end
- Ratchet stop


Code	Range	Rods
3241-25	0-25mm	1pc
3241-100	0-100mm	4pcs
3241-150	0-150mm	6pcs
3241-300	0-300mm	12pcs

## LIGHT DUTY DIGITAL HEIGHT GAGE




1150-500

1150-1000

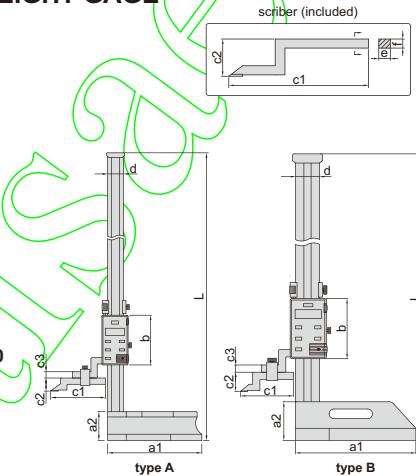

ATTENTION: BASIC MODEL

DATA OUTPUT

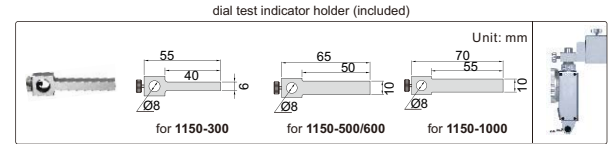

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, ABS/INC, data hold, TOL, set
- ABS/INC is for absolute and incremental measurement
- TOL is for tolerance measurement
- Carbide tipped scriber
- Made of stainless steel (except the base)
- LR44 battery
- Data output
- Supplied with dial test indicator holder
- Supplied with dust cover (except 1150-1500/2000)
- Optional accessory: data output cable (code 7301-SPC5)



supplied with dust cover (included)



Code	Range	Type	Accuracy	L	a1	a2	b	c1	c2	c3	d	e	f
1150-300	0-300mm/0-12"	A	±0.04mm	470	135	45	80	76	25	10	23	6	8
1150-500	0-500mm/0-20"	A	±0.05mm	720	180	55	95	103	25	12	30	10	12
1150-600	0-600mm/0-24"	A	±0.05mm	820	180	55	95	103	25	12	30	10	12
1150-1000	0-1000mm/0-40"	B	±0.07mm	1275	250	80	125	110	39	15	50	10	15


Sizes available up to 2000mm

### DIGITAL HEIGHT GAGE WITH DRIVING WHEEL


- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, preset (+, -), hold
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel
- Battery CR2032
- Data output
- Supplied with dust cover
- Optional accessory: data output cable, dial test indicator holder (code 6293-6)

DATA OUTPUT


METAL RACK



1156-300



dial test indicator holder (optional)





Code	Range	Accuracy	L
1156-300	0-300mm/0-12"	±0.03mm	515
1156-600	0-600mm/0-24"	±0.05mm	815

### DIAL HEIGHT GAGE


- Dial indicator graduation: 0.01mm
- One counter reads in the plus direction and another in the minus direction, so incremental measurement can be made in either direction
- Carbide tipped scriber
- Made of stainless steel (except the base)
- With driving wheel
- Supplied with dust cover
- Optional accessory: dial test indicator holder (code 6293-6)



1351-300



dial test indicator holder (optional)



Code	Range	Accuracy
1351-300	0-300mm	±0.04mm



Sizes available up to 600mm

### VERNIER HEIGHT GAGE


- Graduation: 0.02mm/0.001"
- Adjustable main scale to set zero
- Carbide tipped scriber
- Made of stainless steel (except the base)
- Satin chrome plated scale
- Supplied with magnifier
- With fine adjustment
- Supplied with dust cover
- Optional accessory: dial test indicator holder (code 6293-6)



1250-300



dial test indicator holder (optional)



Code	Range	Accuracy	L	a1	a2	b	c1	c2	d
1250-300	0-300mm/0-12"	±0.04mm	545	135	43	75	80	30	28
1250-600	0-600mm/0-24"	±0.05mm	870	180	54	85	80	41	35

### DIGITAL OUTSIDE MICROMETER

- Resolution: 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: data output cable



3101-25A



IP65 WATERPROOF

DATA OUTPUT

Code	Range	Accuracy	L	a	b	c
3101-25A*	0-25mm/0-1"	±2µm	32.5	6	24	3
3101-50A*	25-50mm/1-2"	±2µm	57.5	8	32	3

\* Supplied with manufacturer inspection certificate traceable to DKD Germany  
 - Sizes available up to 300mm

